
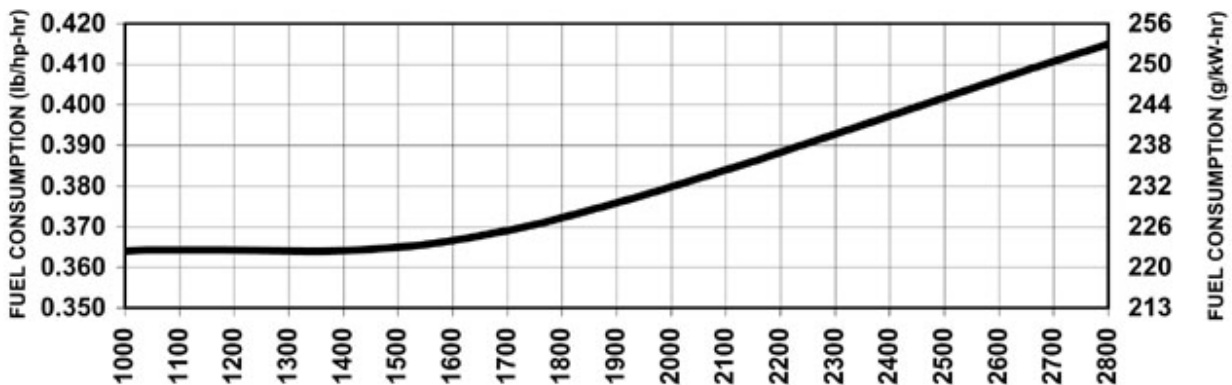
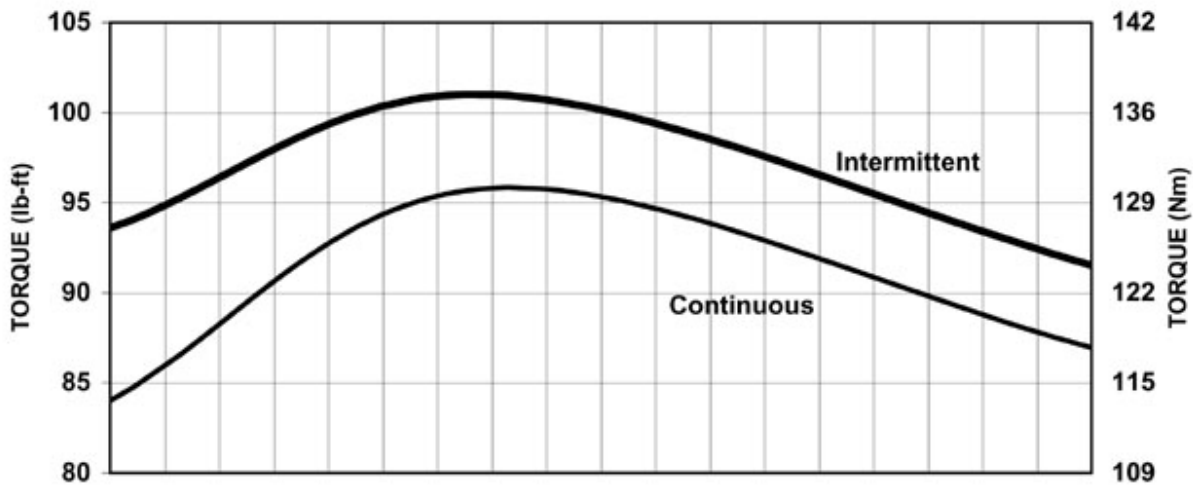


ENGINE PERFORMANCE CURVES

ENGINE MODEL D 2011 L03o
 RATING STANDARD ISO 14396
 RATED INTERMITTENT POWER (gross) 48.8 Hp at 2800 rpm
 MAX. TORQUE 101 lb-ft at 1700 rpm
 EMISSION CERTIFICATION EPA Tier 4i / COM 3a

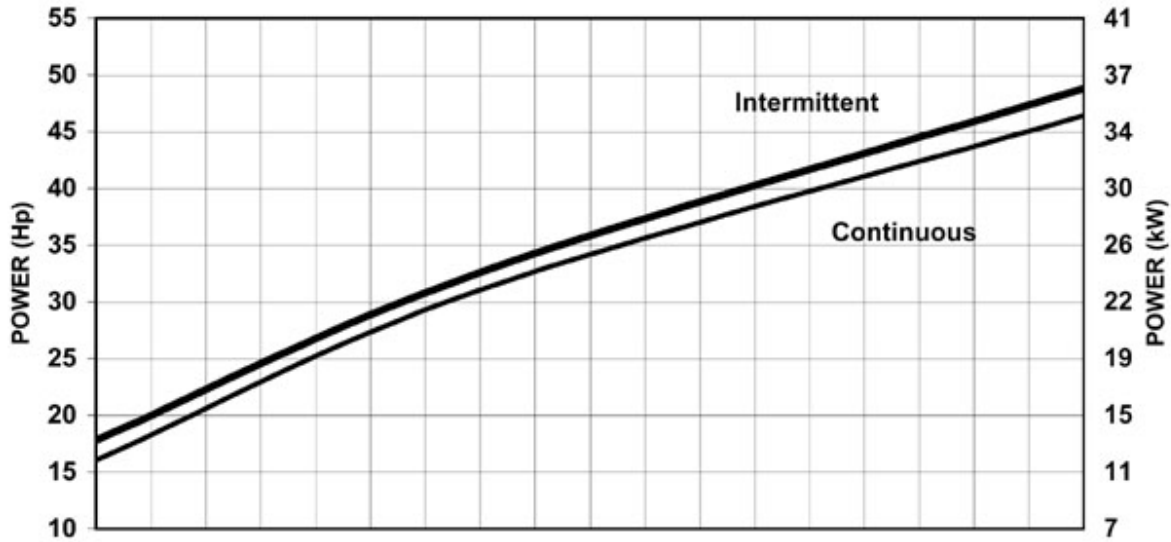

Tolerance: +/- 5% per ISO 14396
 Reference conditions: 25 °C (77 °F) 99 kPa (29.31 in. Hg)
 Fuel: 40 °C (104 °F) 0.850 kg/l (7.07 lb/gal)

Document: D2011L03o_T4i
 Date: 10 Dec, 2007
 Name: B. Wilson

Curves are based on current data and are subject to change without notice.

Printed 12/12/2007,11:47 AM