


# ENGINE PERFORMANCE CURVES

ENGINE MODEL  
RATING STANDARD  
RATED POWER  
MAX. TORQUE  
Emission Certification

TCD 2013 L04 2V  
ISO 14 396  
173 Hp @ 2300 rpm  
494 lb-ft @ 1600 rpm  
EPA Tier 3 / COM 3

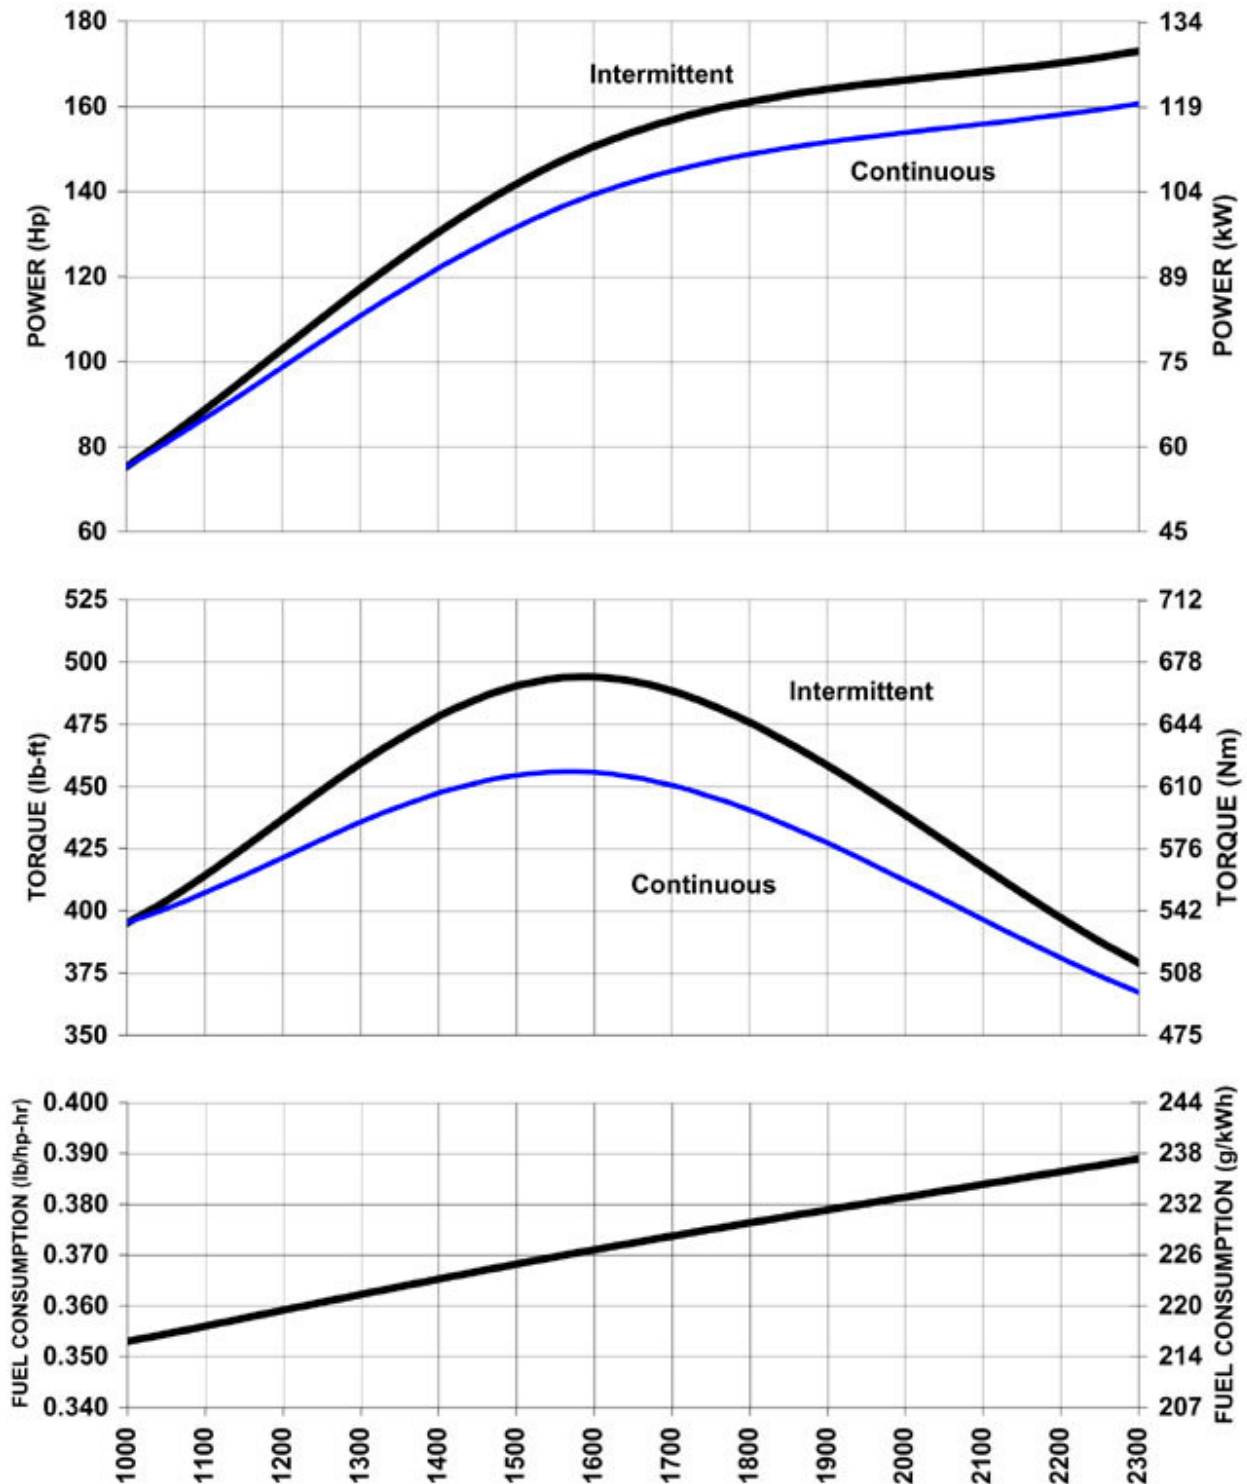

Reference conditions: 25 °C (77 °F) 99 kPa (29.31 in. Hg) combustion air  
40 °C (104 °F) 0.850 kg/l (7.07 lb/gal) fuel




Curves are based on current data, and are subject to change without notice.

Printed 8/29/2007, 4:49 PM

# ENGINE PERFORMANCE CURVES

ENGINE MODEL  
RATING STANDARD  
RATED POWER  
MAX. TORQUE  
Emission Certification

TCD 2013 L04 2V  
ISO 14 396  
169 Hp @ 2300 rpm  
474 lb-ft @ 1600 rpm  
EPA Tier 3 / COM 3

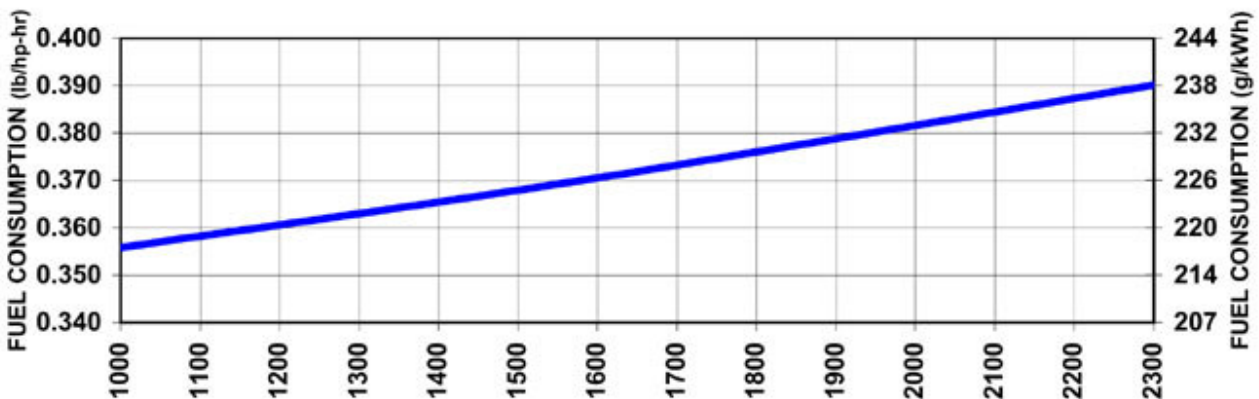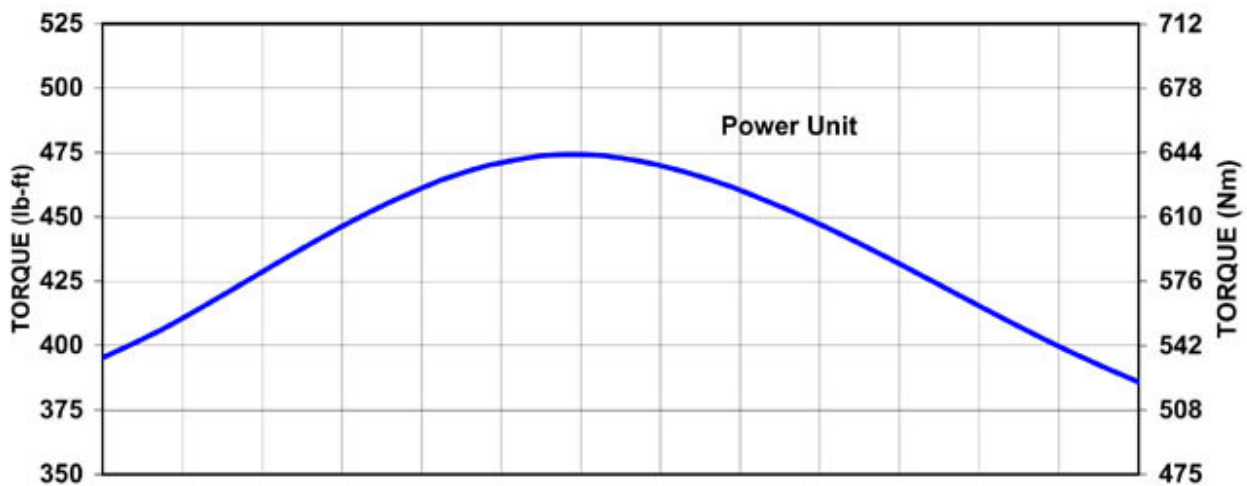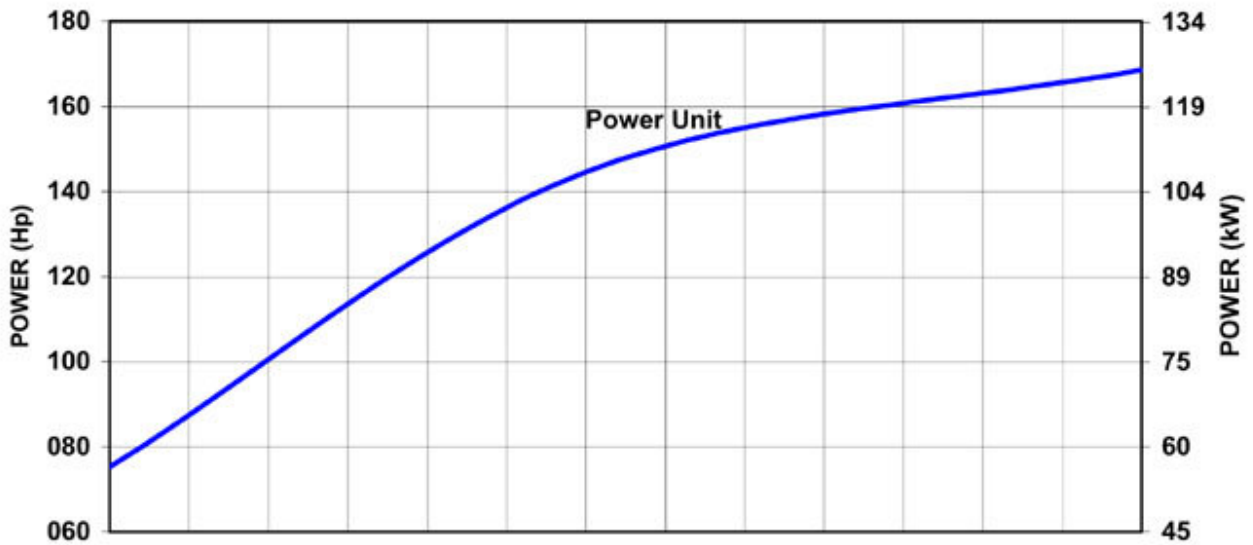

Reference conditions: 25 °C (77 °F) 99 kPa (29.31 in. Hg) combustion air  
40 °C (104 °F) 0.850 kg/l (7.07 lb/gal) fuel

Curves are based on current data, and are subject to change without notice.

Printed 8/29/2007, 5:00 PM